


## ALSAN RS Waterproofing System for Joints with ALSAN RS 230 Resin for horizontal expansion joints

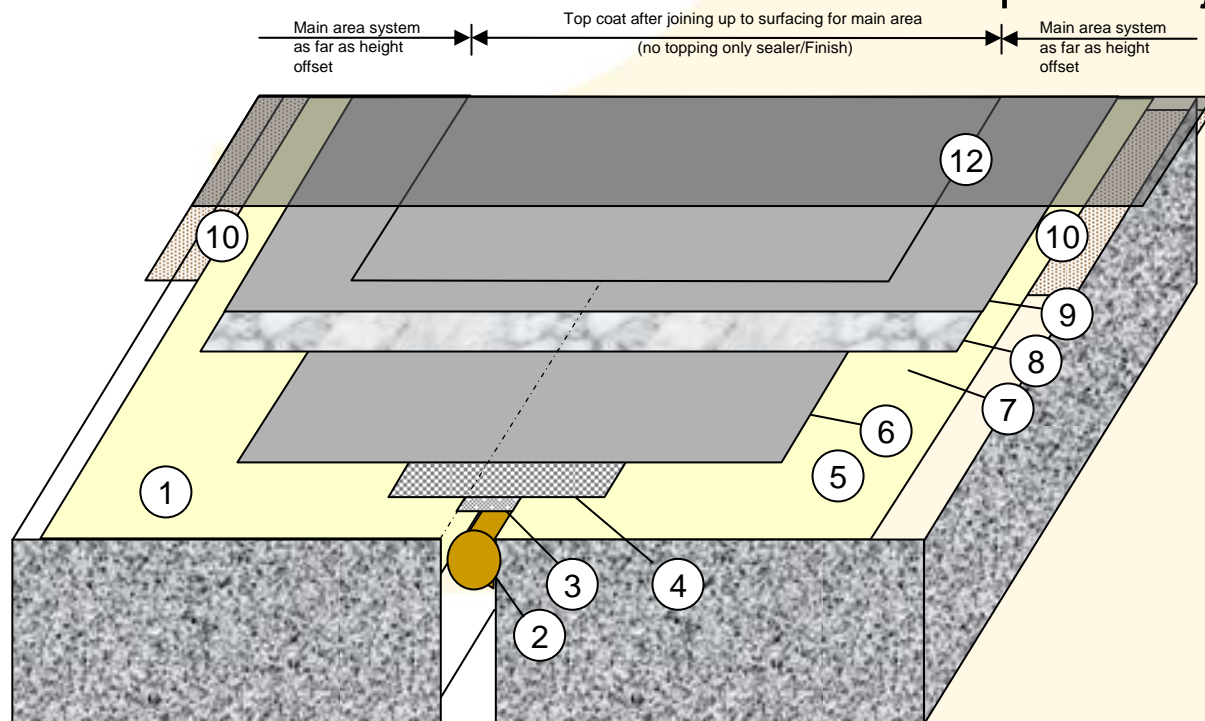

- 1 Mechanical pre-treatment of the substrate + primer (**ALSAN RS 276 Primer**)
- 2 Round cord, closed-cell
- 3 **ALSAN RS Mortar** for filling joints
- 4 **Joint (sliding) tape**, width = 10 cm
- 5 **ALSAN RS 230 Resin** (thix, TT) fleece-embedding layer (approx. 2.00 kg/m<sup>2</sup>)
- 6 **ALSAN RS Fleece** strip, width = 26 cm
- 7 **ALSAN RS 230 Resin** (thix, TT) fleece intermediate layer (approx. 2.00 kg/m<sup>2</sup>)
- 8 **ALSAN RS Fleece** strip, width = 35 cm
- 9 **ALSAN RS 230 Resin** (thix, TT) fleece-saturating layer (approx. 1.50 kg/m<sup>2</sup>)
- 10 Junction with system for main area, right and left (e.g. Wecryl RS 233)
- 11 **ALSAN RS 230 Resin** (thix, TT) top coat (approx. 1.50 kg/m<sup>2</sup>)
- 12 **ALSAN RS 288 Finish**, pigmented